

TAPTONE

REJECTORS

Sorting, Distribution,
and Rejection
Systems Include:

- Large Container, Small Container and Case Systems
- Hard Reject and Soft Reject Systems



TELEDYNE TAPTONE
Package Inspection Systems
A Teledyne Technologies Company

www.TapTone.com

FREE PRODUCT TESTING

Teledyne TapTone offers free product testing to assure that your product can be inspected with the proper technology before you purchase a TapTone system. Our application engineers will return a comprehensive report on the testability of your product. To submit samples for evaluation, call us or visit our website to obtain a Sample Testing Form.

CENTRO TRANSLINER PNEUMATIC Sorting and Distribution System for Glass, Metal, and Plastic Containers

The Centro Transliner is a standing rejector system that will sort and distribute containers up to 8.8 lb (4 kg) in weight and can be used for complex distribution requirements. Even plastic bottles containing at least 20 mm of liquid are sorted out in an upright position. The Centro Transliner is also suitable for use with unusually shaped glass bottles.

Features

- Upright Rejection and Distribution of Containers
- Precise Electronic Control of the Transfer Plate
- Multiple Sorting within Confined Spaces
- Low Wear and Rugged Design
- Integrated Self-diagnostics Functions




System Specifications

Performance	Up to 600 containers /minute
Container Types	Glass, metal, plastic
Spacing	None required
Electrical	24 VDC (provided from reject signal)
Air	80–120 psi (6–8 bar)
Dimensions (LxWxH) ...	18 1/2 in x 13 13/16 in x 27 11/16 in (47 cm x 35 cm x 55 cm)

How It Works

The Centro Transliner is used for standing transfer of containers in extremely confined conditions. The mechanical motion sequence is designed in such a way that the bottles to be rejected are transported at a defined speed. The transfer plate is retracted from the conveyor path, thus ensuring that the neighboring bottle is not touched.

CENTRO TRANSLINER

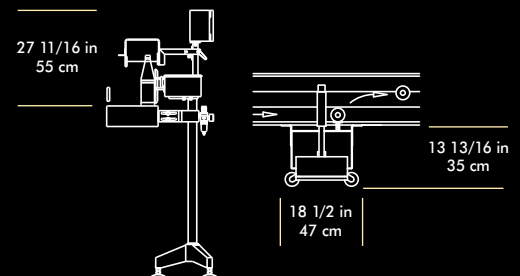

www.TapTone.com

49 Edgerton Drive • North Falmouth, MA 02556 USA

P: 508.563.1000

F: 508.564.9945

E-Mail: taptone@teledyne.com

ISO 9001 Certified CE Compliant

AWN: 07-010. 9/2007. Specifications subject to change without notice.
TAPTONE is a registered trademark of TELEDYNE TAPTONE. Copyright 2007, TELEDYNE TAPTONE.