

DBC25

Under counter beer cooler

The DBC25 is a standard draught beer cooler developed by Gamko. It combines proven technology and reliability at a competitive price.

Reliability

For over 45 years Gamko has been manufacturing cooling equipment for the catering industry. This vast experience and the use of only first-class components have made Gamko the reliable partner for the brewing industry it is today.

Flexibility through customising packs

The basic product DBC25 can be supplied with a standard pack or customised with various brewery specific packs.

Each pack contains:

- top lid
- beercoils
- pump / agitator
- flex lead

In order to guarantee optimal cold exchange between water and beercoil, each beercoil configuration is specifically designed by our engineering department.

The connectors on the top of the beer cooler are placed close together for easy connection to the python line.

DBC25, Gamko's standard solution for draught beer cooling.



DBC25

Technical information




DBC25

Tap capacity
Compressor capacity
Cooling capacity
Voltage range
Power consumption
Refrigerant
Thermostat
Ice-bank capacity
Water bath nett contents
Nett weight (excl. water)
Dimensions (WxDxH)
No. of coils possible
Insulation
Finish exterior
Accessories

under counter beer cooler

81 lt / hr*
8,8 cc
551 Watt** (475 Kcal / hr)
220 - 240 V / 50 Hz
290 Watt**
R134a
mechanical, -2°C / +10°C
13 kg
31 lt
30 kg
400 x 400 x 585 mm
4
Pu
silver coloured skin plate
set of 4 castors
water outlet in bottom of water bath

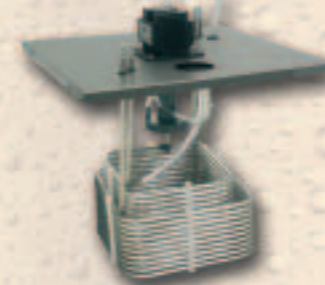


Loading capacity

container (40 ft) : 200
truck (13,6 m) : 232

P25/01 Contains

standard pack

silver coloured skin plate top lid
coils: 2 x 10 m 7/8
ECO pump
flex lead: EU-plug

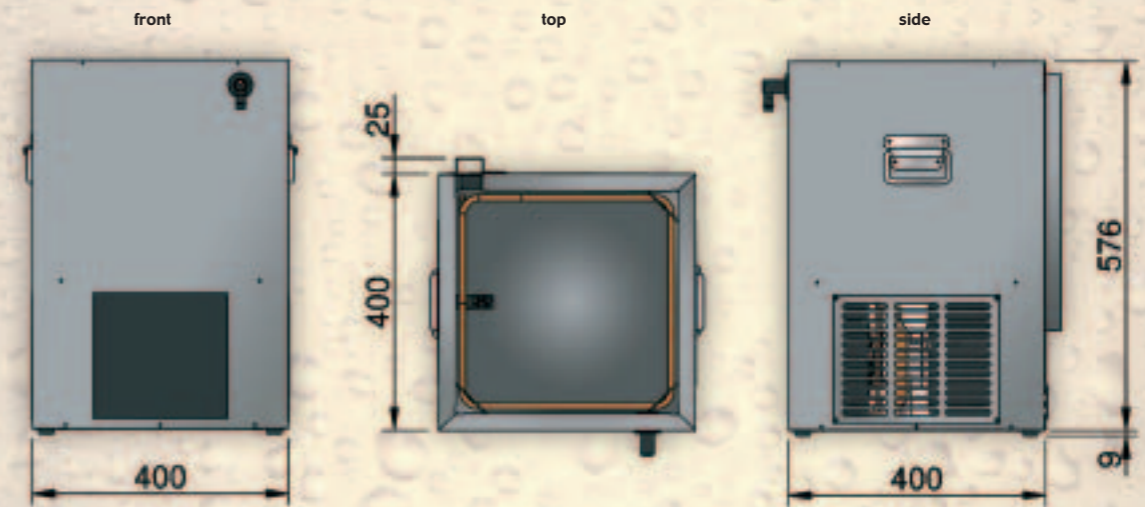

* at 10°C temperature difference keg-tap, ice-bank used in 3 hours

** at -4°C evaporation temperature / 45°C condensing temperature